

New
syllabus
2020-21

Chapter 4
**Number System
&
Encoding Schemes**

Computer Science
Class XI (As per CBSE Board)

Visit : python.mykvs.in for regular updates

Number System



In general term computer represent information in different types of data forms i.e. number , character ,picture ,audio , video etc.

Computers are made of a series of switches/ gates. Each switch has two states: ON(1) or OFF(0).That's why computer works on the basis of binary number system(0/1).But for different purpose different number systems are used in computer world to represent information. E.g. Octal, Decimal, Hexadecimal.

NUMBER SYSTEM		
SYSTEM	BASE	DIGIT
Binary	2	0 1
Octal	8	0 1 2 3 4 5 6 7
Decimal	10	0 1 2 3 4 5 6 7 8 9
Hexadecimal	16	0 1 2 3 4 5 6 7 8 9 A B C D E F



Decimal Number System

Characteristics

- Ten symbols
- 0 1 2 3 4 5 6 7 8 9

Positional

- $2945 \neq 2495$
- $2945 = (2 * 10^3) + (9 * 10^2) + (4 * 10^1) + (5 * 10^0)$

(Most) people use the decimal number system Why?

THIS A POSITIONAL NUMBER SYSTEM .and that's of great advantage ..simple shifting the position of decimal.It become complex either case to use number system <10 or >10 .

Binary Number System

Characteristics

- Two symbols
- 0 1

Positional

- Positional
- $1010_2 \neq 1100_2$

Most (digital) computers use the binary number system Why?

Computers are made of a series of switches/ gates. Each switch has two states: ON(1) or OFF(0). That's why computer works on the basis of binary number system(0/1).

Decimal-Binary Equivalence



Decimal Binary

0	0
1	1
2	10
3	11
4	100
5	101
6	110
7	111
8	1000
9	1001
10	1010
11	1011
12	1100
13	1101
14	1110
15	1111

Decimal Binary

16	10000
17	10001
18	10010
19	10011
20	10100
21	10101
22	10110
23	10111
24	11000
25	11001
26	11010
27	11011
28	11100
29	11101
30	11110
31	11111



Binary – Decimal Conversion

Using positional notation

$$100101_2 = (1*2^5)+(0*2^4)+(0*2^3)+(1*2^2)+(0*2^1)+(1*2^0)$$

$$= 32 + 0 + 0 + 4 + 0 + 1$$

$$= 37$$



Decimal-Binary Conversion

Using the Division Method:

Divide decimal number by 2 until you reach zero, and then collect the remainders in reverse. $22_{10} = 10110_2$

$2 \overline{) 22}$	<u>Rem:</u>
$2 \overline{) 11}$	0
$2 \overline{) 5}$	1
$2 \overline{) 2}$	1
$2 \overline{) 1}$	0
0	1



Hexadecimal Number System

Characteristics

- Sixteen symbols
- 0 1 2 3 4 5 6 7 8 9 A B C D E F

Positional

$A13D_{16} \neq 3DA1_{16}$

Computer programmers often use the hexadecimal number system, Why?

Computers only work on the binary number system. The hexadecimal number system is commonly used to describe locations in computer memory. They are also used in assembly language instructions.

Decimal-Hexadecimal Equivalence

<u>Decimal</u>	<u>Hex</u>	<u>Decimal</u>	<u>Hex</u>	<u>Decimal</u>	<u>Hex</u>
0	0	16	10	32	20
1	1	17	11	33	21
2	2	18	12	34	22
3	3	19	13	35	23
4	4	20	14	36	24
5	5	21	15	37	25
6	6	22	16	38	26
7	7	23	17	39	27
8	8	24	18	40	28
9	9	25	19	41	29
10	A	26	1A	42	2A
11	B	27	1B	43	2B
12	C	28	1C	44	2C
13	D	29	1D	45	2D
14	E	30	1E	46	2E
15	F	31	1F	47	2F



Hexadecimal to decimal

$$\begin{aligned}25_{16} &= (2 * 16^1) + (5 * 16^0) \\ &= 32 + 5 \\ &= 37\end{aligned}$$

Decimal to hexadecimal

$$\begin{aligned}37 / 16 &= 2 \text{ R } 5 \\ 2 / 16 &= 0 \text{ R } 2\end{aligned}$$



Read from bottom
to top: 25_{16}



Binary - hexadecimal

Four-bit Group

0000

0001

0010

0011

0100

0101

0110

0111

1000

1001

1010

1011

1100

1101

1110

1111

Decimal Digit

0

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

Hexadecimal Digit

0

1

2

3

4

5

6

7

8

9

A

B

C

D

E

F



i

Binary to hexadecimal

Convert 110100110_2 to hex

Starting at the right end, split into groups of 4:

1 1010 0110 ->

0110 = 6

1010 = A

0001 = 1 (pad empty digits with 0)

$110100110_2 = 1A6_{16}$

Visit : python.mykvs.in for regular updates



Hexadecimal to Binary

Convert $3D9_{16}$ to binary

Convert each hex digit to 4 bits:

$$3 = 0011$$

$$D = 1101$$

$$9 = 1001$$

$$0011 \ 1101 \ 1001 \ ?$$

$$3D9_{16} = 111101100_{12} \text{ (can remove}$$

leading zeros)



i

Octal Number System

Characteristics

- Eight symbols
- 0 1 2 3 4 5 6 7

Positional

- $1743_8 \neq 7314_8$

Computer programmers often use the octal number system, Why?

Octal and hex use the human advantage that they can work with lots of symbols while it is still easily convertible back and forth between binary.

Decimal-Octal Equivalence

<u>Decimal</u>	<u>Octal</u>
----------------	--------------

0	0
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	10
9	11
10	12
11	13
12	14
13	15
14	16
15	17

<u>Decimal</u>	<u>Octal</u>
----------------	--------------

16	20
17	21
18	22
19	23
20	24
21	25
22	26
23	27
24	30
25	31
26	32
27	33
28	34
29	35
30	36
31	37

<u>Decimal</u>	<u>Octal</u>
----------------	--------------

32	40
33	41
34	42
35	43
36	44
37	45
38	46
39	47
40	50
41	51
42	52
43	53
44	54
45	55
46	56
47	57

Octal to decimal



positional powers of 8:	8 ²	8 ¹	8 ⁰
decimal positional value:	64	8	1
Octal number:	3	5	7

$$(3 \times 64) + (5 \times 8) + (7 \times 1)$$

$$= 192 + 40 + 7 = 239_{10}$$

Decimal to octal



Using the Division Method:

Example 1:

$$214_{10} = 326_8$$

8)	214	Rem:	
8)	26		6
8)	3		2
		0		3



Binary-Octal Conversion

E.g.

001010000100111101₂
1 2 0 4 7 5₈

Octal to binary

1 2 0 4 7 5₈
001010000100111101₂

Binary addition



1


$$\begin{array}{r} 3 \\ + 10 \\ \hline 13 \end{array} \qquad \begin{array}{r} 0011_2 \\ + 1010_2 \\ \hline 1101_2 \end{array}$$

Start at right column
Proceed leftward Carry
1 when necessary



i Encoding Schemes/ String representation

String is any finite sequence of characters. Any string includes letters, numerals, symbols and punctuation marks.

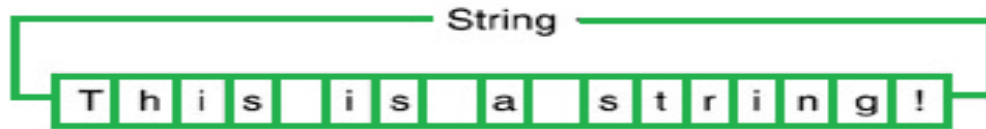

Computers are designed to work internally with numbers. In order to handle characters, we need to choose a number for each character. There are many ways to do this, which are known as encoding schemes.

Encoding schemes



Following are some Encoding schemes

- ASCII
- UNICODE
- ISCII

Encoding Scheme



ASCII

It is most common coding system (Pronounced *ass-key*).

ASCII = American National Standard Code for Information Interchange

It is Defined in ANSI document X3.4-1977. It is a 7-bit code. Its 8th bit is unused (or used for a parity bit)

$2^7 = 128$ codes

Two general types of codes:

95 are “Graphic” codes (displayable on a console)

33 are “Control” codes (control features of the console or communications channel)

ASCII



i

Encoding Scheme

	000	001	010	011	100	101	110	111
0000	NULL	DLE		0	@	P	`	p
0001	SOH	DC1	!	1	A	Q	a	q
0010	STX	DC2	"	2	B	R	b	r
0011	ETX	DC3	#	3	C	S	c	s
0100	EDT	DC4	\$	4	D	T	d	t
0101	ENQ	NAK	%	5	E	U	e	u
0110	ACK	SYN	&	6	F	V	f	v
0111	BEL	ETB	'	7	G	W	g	w
1000	BS	CAN	(8	H	X	h	x
1001	HT	EM)	9	I	Y	i	y
1010	LF	SUB	*	:	J	Z	j	z
1011	VT	ESC	+	;	K	[k	{
1100	FF	FS	,	<	L	\	l	
1101	CR	GS	-	=	M]	m	}
1110	SO	RS	.	>	N	^	n	~
1111	SI	US	/	?	O	_	o	DEL

Encoding Scheme

ASCII CHART

MOST SIGNIFICANT BIT

	000	001	010	011	100	101	110	111
0000	NULL	DLE		0	@	P	`	p
0001	SOH	DC1	!	1	A	Q	a	q
0010	STX	DC2	"	2	B	R	b	r
0011	ETX	DC3	#	3	C	S	c	s
0100	EDT	DC4	\$	4	D	T	d	t
0101	ENQ	NAK	%	5	E	U	e	u
0110	ACK	SYN	&	6	F	V	f	v
0111	BEL	ETB	'	7	G	W	g	w
1000	BS	CAN	(8	H	X	h	x
1001	HT	EM)	9	I	Y	i	y
1010	LF	SUB	*	:	J	Z	j	z
1011	VT	ESC	+	;	K	[k	{
1100	FF	FS	,	<	L	\	l	
1101	CR	GS	-	=	M]	m	}
1110	SO	RS	.	>	N	^	n	~
1111	SI	US	/	?	O	_	o	DEL

LEAST SIGNIFICANT BIT

Visit : python.mykvs.in for regular updates

Encoding Scheme

ASCII

“Hello, world” Example

	Binary		Hexadecimal		Decimal
H	= 01001000	=	48	=	72
e	= 01100101	=	65	=	101
l	= 01101100	=	6C	=	108
l	= 01101100	=	6C	=	108
o	= 01101111	=	6F	=	111
,	= 00101100	=	2C	=	44
	= 00100000	=	20	=	32
w	= 01110111	=	77	=	119
o	= 01100111	=	67	=	103
r	= 01110010	=	72	=	114
l	= 01101100	=	6C	=	108
d	= 01100100	=	64	=	100



Encoding Scheme

UNICODE

It is a worldwide character-encoding standard .Its main objective is to enable a single, unique character set that is capable of supporting all characters from all scripts, as well as symbols, that are commonly utilized for computer processing throughout the world.

Encoding Scheme

ISCII

ISCII stands for Indian Script Code for Information Interchange for Indian languages. It is an 8-bits code to represent Indian scripts.

The Department of Electronics (DOE) has established standard and standard are in action from 1983.

These codes are used for 10 Indian scripts- Devanagari, Punjabi, Gujrati, Udia, Bengali, Asami, Telgu, Kannad, Malayalam and Tamil. C-DAC (established in August-September, 1988) developed standard for font coding in 1990 is called ISFOC (Indian Standards for Font Coding).