



# Computer Science

## Class XI ( As per CBSE Board)

Visit : [python.mykvs.in](http://python.mykvs.in) for regular updates




# Python Module

A module is a logical organization of Python code. Related code are grouped into a module which makes the code easier to understand and use. Any python module is an object with different attributes which can be bind and referenced.

Simply, it is a file containing a set of functions which can be included in our application.

Python provide inbuilt standard modules, like math, random etc.

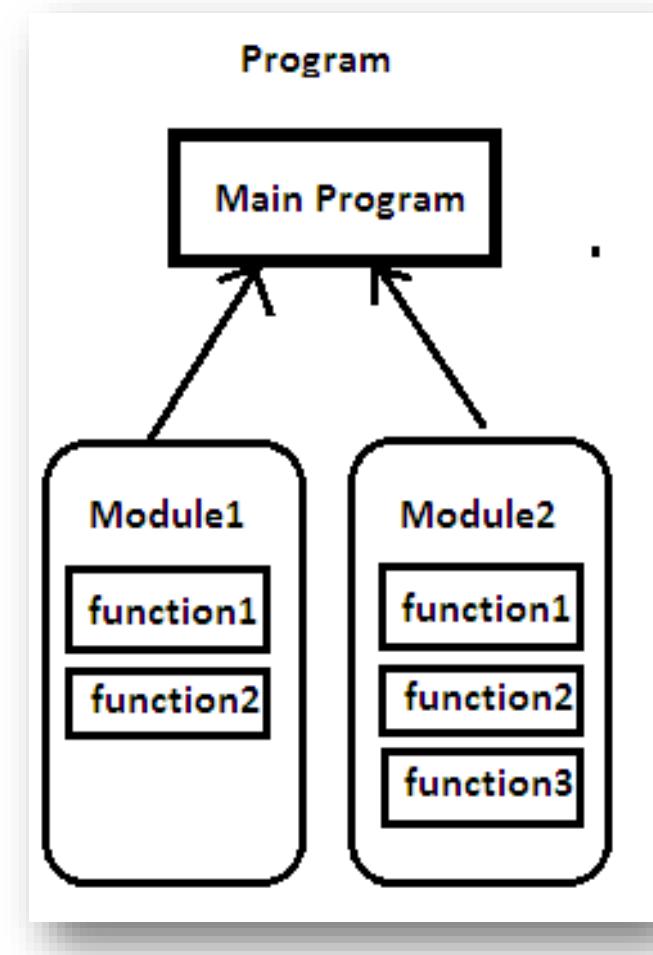



# Python Module

## math module

The math module is a standard module in Python and is always available. To use mathematical functions under this module, we have to import the module using import math statement.

### How to use math function

```
import math  
math.sqrt(4)
```



# Python Module

**math.sqrt()**

The **math.sqrt()** method returns the square root of a given number.

```
>>>math.sqrt(100)
```

10.0

```
>>>math.sqrt(3)
```

1.7320508075688772

The **ceil()** function approximates the given number to the smallest integer, greater than or equal to the given floating point number. The **floor()** function returns the largest integer less than or equal to the given number.

```
>>>math.ceil(4.5867)
```

5

```
>>>math.floor(4.5687)
```

4

**math.pow()**

The **math.pow()** method receives two float arguments, raises the first to the second and returns the result. In other words, **pow(2,3)** is equivalent to **2\*\*3**.

```
>>>math.pow(2,4)
```

16.0



i

# Python Module

## math.fabs()

Returns the absolute value of x

```
>>> import math
```

```
>>> math.fabs(-5.5)
```

```
5.5
```

The math module contains functions for calculating various trigonometric ratios for a given angle. The functions (sin, cos, tan, etc.) need the angle in radians as an argument.

```
>>> math.sin(270)
```

```
-0.1760459464712114
```



# Python Module

## Random Module

The random module provides access to functions that support many operations. Perhaps the most important thing is that it allows us to generate random numbers.

**random.randint()**

Randint accepts two parameters: a lowest and a highest number.

```
import random
```

```
print (random.randint(0, 5))
```

This will output either 1, 2, 3, 4 or 5.

**random.random()**

Genereate random number from 0.01 to 1. If we want a larger number, we can multiply it.

```
import random
```

```
print(random.random() * 100)
```



**randrange()**

generate random numbers from a specified range and also allowing rooms for steps to be included.

**Syntax :**

```
random.randrange(start(opt),stop,step(opt))
```

```
import random
```

```
# Using randrange() to generate numbers from 0-100
```

```
print ("Random number from 0-100 is : ",end="")
```

```
print (random.randrange(100))
```

```
# Using randrange() to generate numbers from 50-100
```

```
print ("Random number from 50-100 is : ",end="")
```

```
print (random.randrange(50,100))
```

```
# Using randrange() to generate numbers from 50-100
```

```
# skipping 5
```

```
print ("Random number from 50-100 skip 5 is : ",end="")
```

```
print (random.randrange(50,100,5))
```

**OUTPUT**

Random number from 0-100 is : 27

Random number from 50-100 is : 48

Random number from 50-100 skip 5 is : 80



# Python Module

## statistics module

This module provides functions for calculating mathematical statistics of numeric (Real-valued) data.

### **statistics.mean(data)**

Return the sample arithmetic mean of data which can be a sequence or iterator. The arithmetic mean is the sum of the data divided by the number of data points(AVERAGE).

```
import statistics
```

```
print(statistics.mean([5,3,2]))
```

### **OUTPUT**

3.333333333333335

### **statistics.median(data)**

Return the median (middle value) of numeric data, using the common “mean of middle two” method. If data is empty, StatisticsError is raised.

```
import statistics
```

```
print(statistics.median([5,5,4,4,3,3,2,2]))
```

### **OUTPUT**

3.5



# Python Module

---

## **statistics.mode(data)**

Return the most common data point from discrete or nominal data. The mode (when it exists) is the most typical value, and is a robust measure of central location. If data is empty, or if there is not exactly one most common value, StatisticsError is raised.

```
import statistics  
print(statistics.mode([1, 1, 2, 3, 3, 3, 3, 4]))
```

## **OUTPUT**

3